



Multi-Electrode Microwave Ceramic Chip Capacitors

I. Applications

Mainly used for impedance matching, parallel resonant circuits, dielectric-resonance tuning, and coupling.

II. Features

- Easy to mount;
- Suitable for circuit design and adjustment.

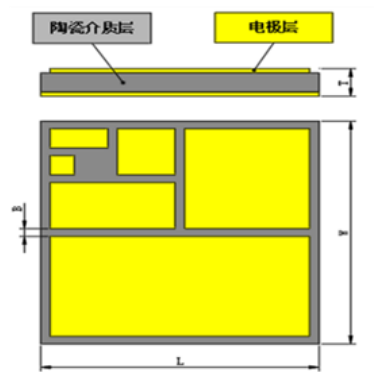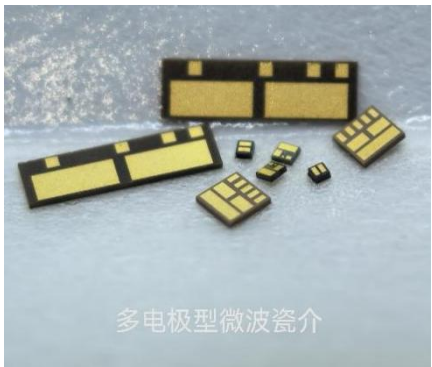

multi-electrode type structure and size code:

structure and size code	outline dimensions (mm)			
	L	W	B	T
SP15	0.381±0.076	0.381±0.076	0.050±0.025	0.102~0.254
SP20	0.508±0.076	0.508±0.076		
SP25	0.635±0.102	0.635±0.102		
SP30	0.762±0.127	0.762±0.127		
SP35	0.889±0.127	0.889±0.127		
SP40	1.016±0.127	1.016±0.127		

remarks: product dimensions can custom design.